


# NON-INSULATED FORK TERMINAL LUGS

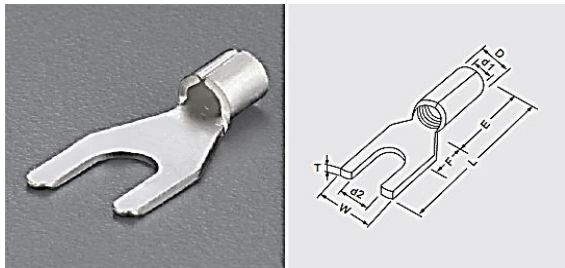

Item	Part No.	Wire Range		Dimension (mm)			
		mm <sup>2</sup>	A.W.G	d2	W	L	E
1	SNB1-3.7S	0.5 - 1.5	22 - 16	3.7	5.7	16	4.8
2	SNB1-4S	0.5 - 1.5	22 - 16	4.3	6.4	16	4.8
3	SNB1-4M	0.5 - 1.5	22 - 16	4.3	7.2	16	4.8
4	SNB1-5S	0.5 - 1.5	22 - 16	5.3	8.1	16	4.8
5	SNB1-6S	0.5 - 1.5	22 - 16	6.4	9.5	16	4.8
6	SNB2-3.7S	1.5 - 2.5	16 - 14	3.7	5.7	16	4.8
7	SNB2-4S	1.5 - 2.5	16 - 14	4.3	6.4	16	4.8
8	SNB2-4M	1.5 - 2.5	16 - 14	4.3	7.2	16	4.8
9	SNB2-5L	1.5 - 2.5	16 - 14	5.3	9.5	16	4.8
10	SNB5-3.7S	4 - 6	12 - 10	3.7	7.2	17.4	6
11	SNB5-3.7	4 - 6	12 - 10	3.7	8.3	18.5	6
12	SNB5-4S	4 - 6	12 - 10	4.3	8.3	18.5	6
13	SNB5-5	4 - 6	12 - 10	5.3	9	18.5	6
14	SNB5-6S	4 - 6	12 - 10	6.4	9	18.5	6
15	SNB5-6L	4 - 6	12 - 10	6.4	12	24.7	6
16	SNB8-4	6 - 10	8	4.3	9	20.8	8.5
17	SNB8-5	6 - 10	8	5.3	9	20.8	8.5
18	SNB8-6	6 - 10	8	6.4	12	23.8	8.5
19	SNB14-5	10 - 16	6	5.3	9	25.5	10.5
20	SNB14-6	10 - 16	6	6.4	11	25.5	10.5