


Installation Guide (For BKT-563)

Important Notes:

All Plasma / LCD TV brackets are thoroughly inspected and fully tested operational in factory. We accept no liability whatsoever for any losses due to improper operation, or any unauthorized alteration. All trademarks contained in this installation guide are the property of their respective owners.

Cantilever Bracket





MODEL.:BKT-563

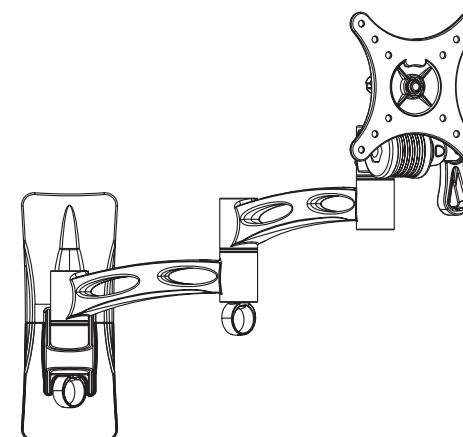

Thank you for choosing our products

- TV Size Range: 10" ~24"
- Max load capacity: 15Kg/33lbs
- Easy to install: sliding plate operation
- Integrated Cable management
- Angle Adjustable

Parts:

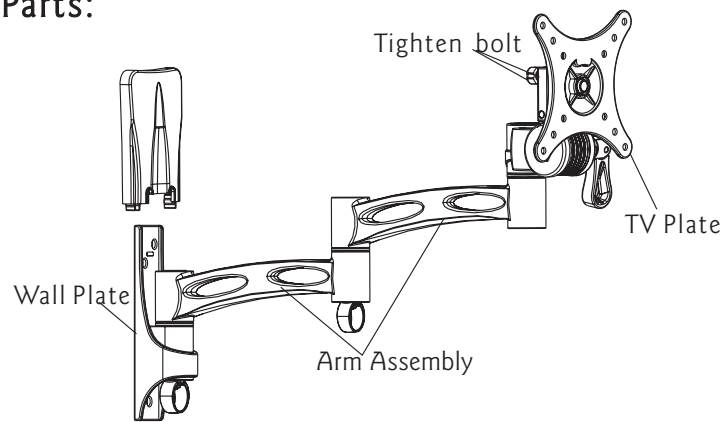

Hardware List:

ID	Qty	Description
A	4	M4x12mm bolt
B	4	M5x12mm bolt
C	3	Long Bolt
D	3	Wall Anchor
E	3	Washer
F	1	Hex Wrench
G	1	Box wrench

Display Adjustments

Roll Control

Function - Horizontal leveling of the display.

Operation - Grasp the sides of the display, and roll it into the desired position. Then adjusting Roll Tension .

Angle adjusting

1. Adjusted with the TV plate .

With circumscribe the wall Plate ,TV can adjust in the direction of left, right ,up and down. Vertical Adjusting Angle is from -5° to 20° . level Adjusting Angle is 20° .

Choose the desired angle and turn clockwise the Tension Knob on the right of the arm.

2. Adjusted with the arms.

With circumscribe the arms, TV can turning to two sides of wall until touch the wall. First joint adjusting angle is $\pm 90^{\circ}$, second is $\pm 180^{\circ}$, third is $\pm 90^{\circ}$.

Caution: The turning angle is not too large. Or it may result in personal injury or product damage.

Use Wrench to adjust the degree of those joints.

Has correctional function: If the wall plate were installed imbalance, you can adjust the TV plate to level off the assembly. Adjust angle is 10° .

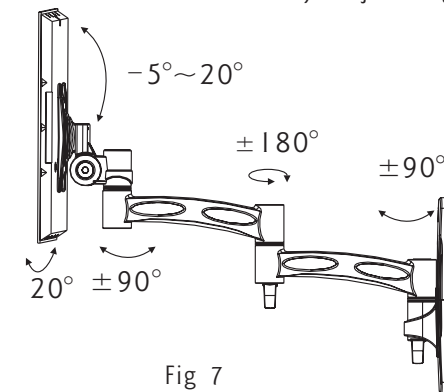


Fig 7


Step 5 Using Cable Management

The mount include a cable management function, where cables can be routed along the Arm Assembly.

Note: For best system performance, route the AC power cable separately from the signal cables. Pull the cables one by one from one side of the gap to the other side of the gap.

With all cables in place, pull the display in and out and check that the arm assembly moves freely, without stretching or damaging the cables.

Important: DO NOT use a hex wrench on the cable, only apply pressure with your finger.

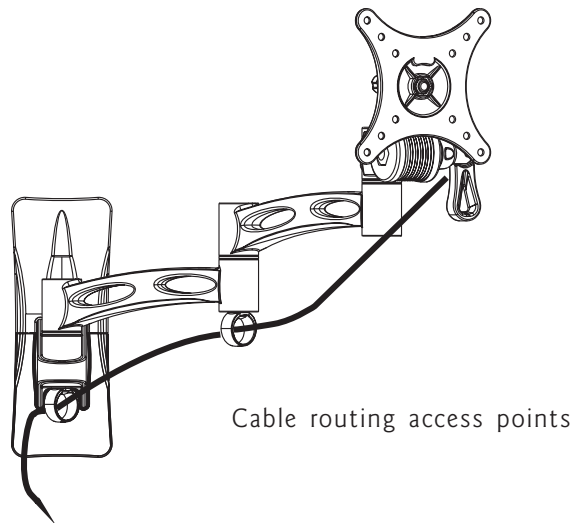

Step 1 Choose fitting position on the wall.

Make sure the position that the wall plate you want installed.

Important: Make sure there is enough space to spread LCD, considering the show size.

Step 2 Installing wall mount

This product offers two installing ways: wooden wall and cement wall. Determine your mounting type and proceed accordingly.

Installing ways of batten wall

Use an electronic detector in lay position to detect the position of batten, then making a mark. Put the wall mount in the installing position flatly, using it as template, lining out holes in the batten. Using a aiguille of dia.4.5mm to drill three 50mm deep holes. Securely mount the wall plate with supplied Long bolts(C) and Washer(E) by Box wrench(G). As shown in Fig 1.

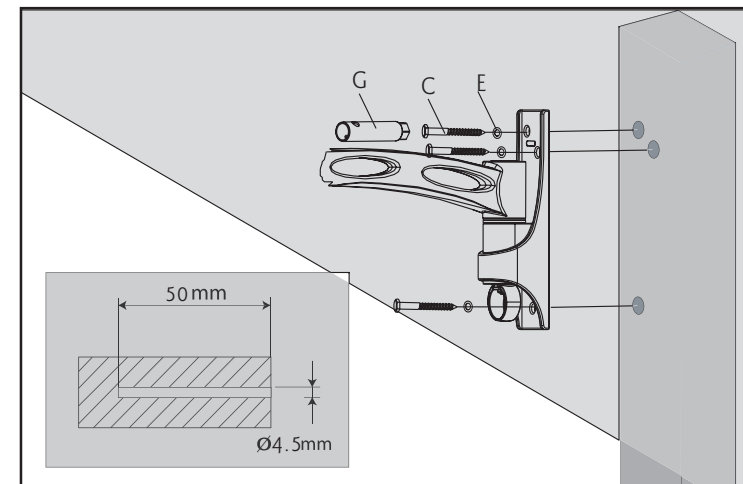


Fig 1

Installing ways of cement and beton wall

Put the wall mount flatly in the installing position, using it as template, lining out the hole on the wall. Use a augille of dia. 10.5mm to drill three 60mm deep holes, Insert the wall anchor(D) into the mounting holes, and lightly tap them flush to the wall with a hammer. Securely mount the wall plate with supplied Long bolts(C) and Washer(E). As shown in Fig2.

Carefully: Wall anchor is just fit for cement and beton wall. Don't use wall anchor in drywall to install bracket.


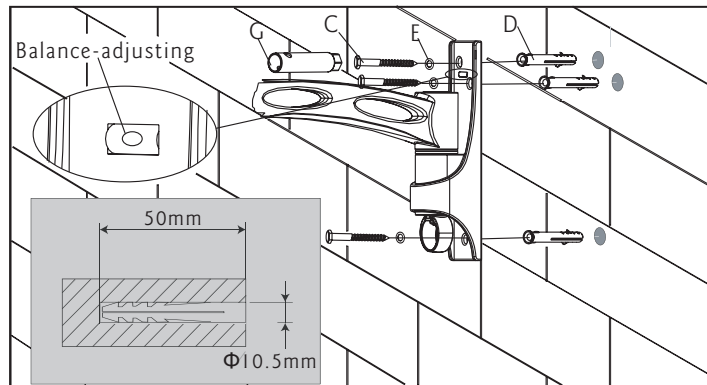


Fig 2

Using balance-adjusting system on the plate, make sure whether wall plate is installed balance. If not, then slide the wall plate let pointer level in the center position.

Installing the Plastic Cover

Secure the separated Plastic Cover over the Wall Plate by pushing them toward each other until they lock in place. See Fig. 3.

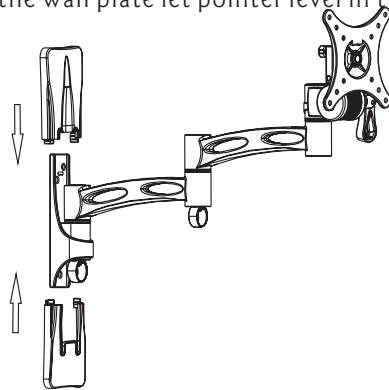

Step3 Installing the LCD

According LCD hole's size, deep, position to choose bolts. Using chose bolts(A,B) to install the LCD on the panel. As shown in Fig3.

Carefully: Don't force the bolt to LCD hole, avoiding damage to people and instrument. Don't use electronics drill to fasten screw

Caution : This Product LCD /Plasma Wall Mount Bracket is intended for use only with the maximum weights indicated .See apparatus instructions .Use with products heavier than the maximum weights indicated instability causing possible injury .

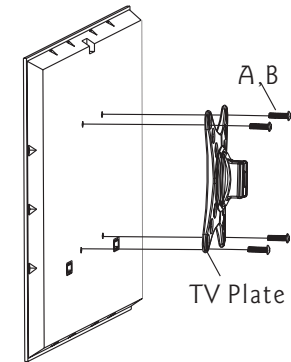


Fig 3

Step4 Hang the display

Firstly lift up the TV plate installed the LCD, making the trough on the arm fit to the trough on it ,according trough to embed the TV plate into the wall plate.

Once the TV is positioned in place, fasten the Tighten Bolts on Receiving Joint clockwise to secure the display to the Arm Assembly.

Warning: Some TV require two people to lift, as we are not responsible for any personal injury or product damage due to mishandling.

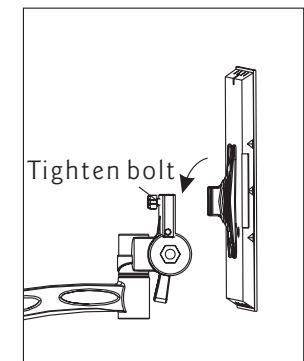


Fig 4