

# PRO-L Series

## Tender / Bid specifications :


### Specifications for Motorized Projection Screen:

Screen Size	:	2740mm x 2740mm to 4226mm x 4226mm
Motor Type	:	AC Tubular Motor; Silent Type
Motor Speed	:	17 rpm
Operating	:	120 deg. Celsius (thermostat cut off motor)
Fabric Roll Speed	:	4.8 m/min
Screen Gain	:	1.1
Viewing Angle	:	160 degrees viewing cone
Screen Materials	:	Matte White, Vinyl fabric, Flame Retardant and fungus resistant
External Wired Control	:	Normally open, momentary contact closure (voltage free)
RF Remote Sensitivity Distance	:	Maximum 15 metres
Power Consumption	:	121W
Current	:	0.53A
Voltage	:	220 - 240 VAC, 50/60 Hz


# Dimension of PRO-L Series Screen

## Casing Sectional View

PRO-L3030 to PRO-L4343

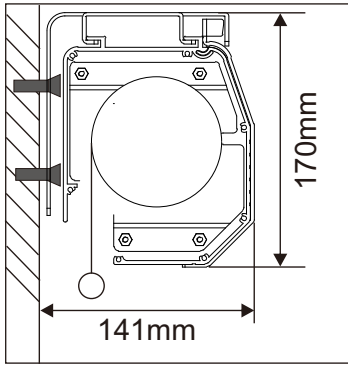

Screen Casing Width = Fabric Width + 130mm

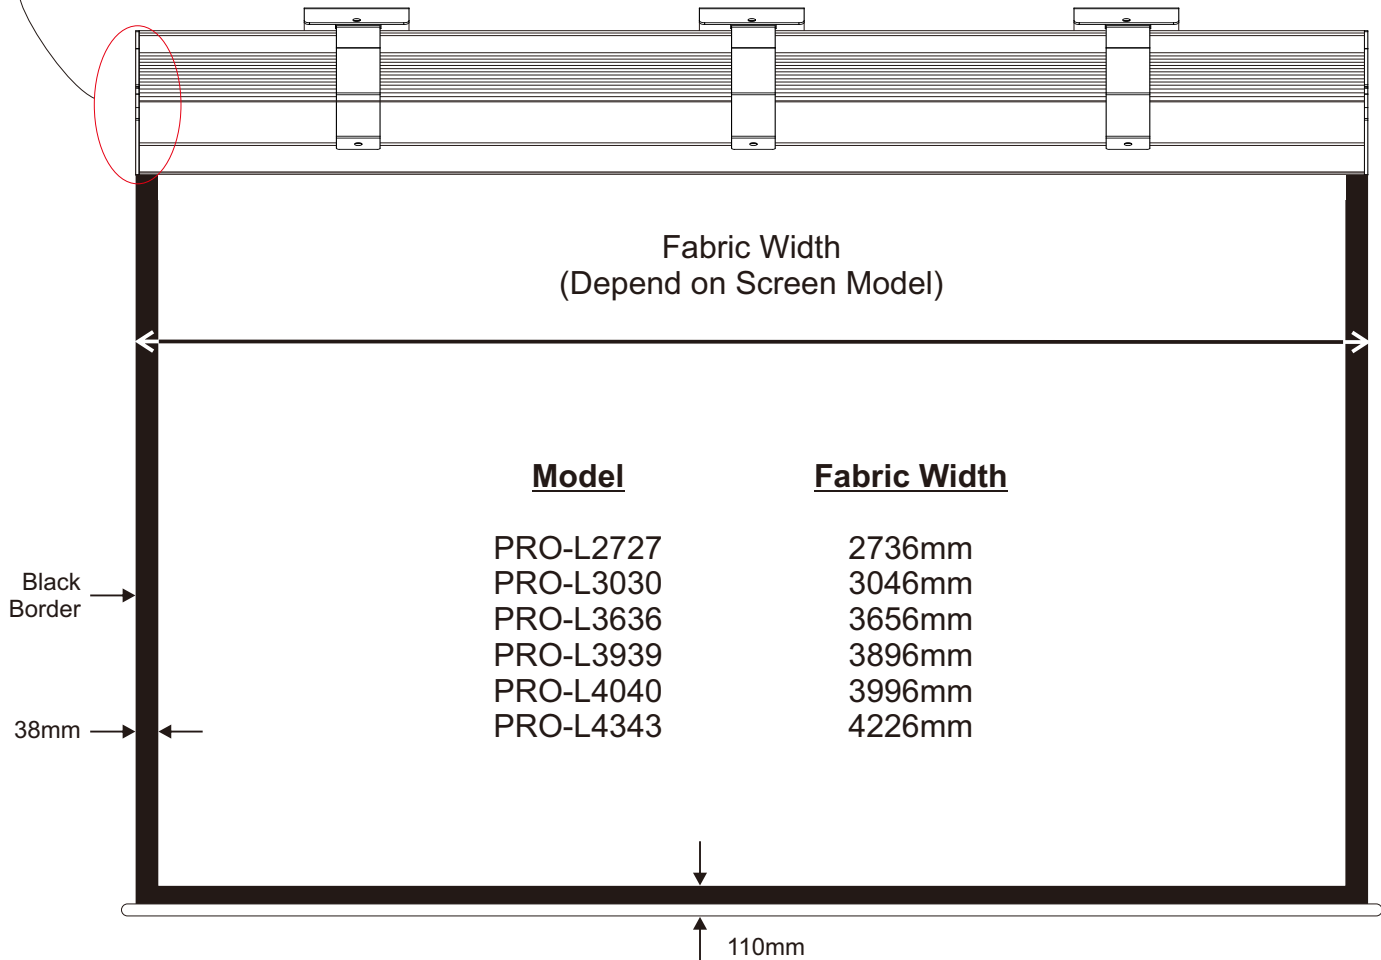


# Pelmet Mounting: Recommended Pelmet Size


## PRO-L Series (Standard Size)

**Recommended Pelmet Width = Screen Casing Width + 150mm**

Screen Casing Width = Fabric Width + 130mm

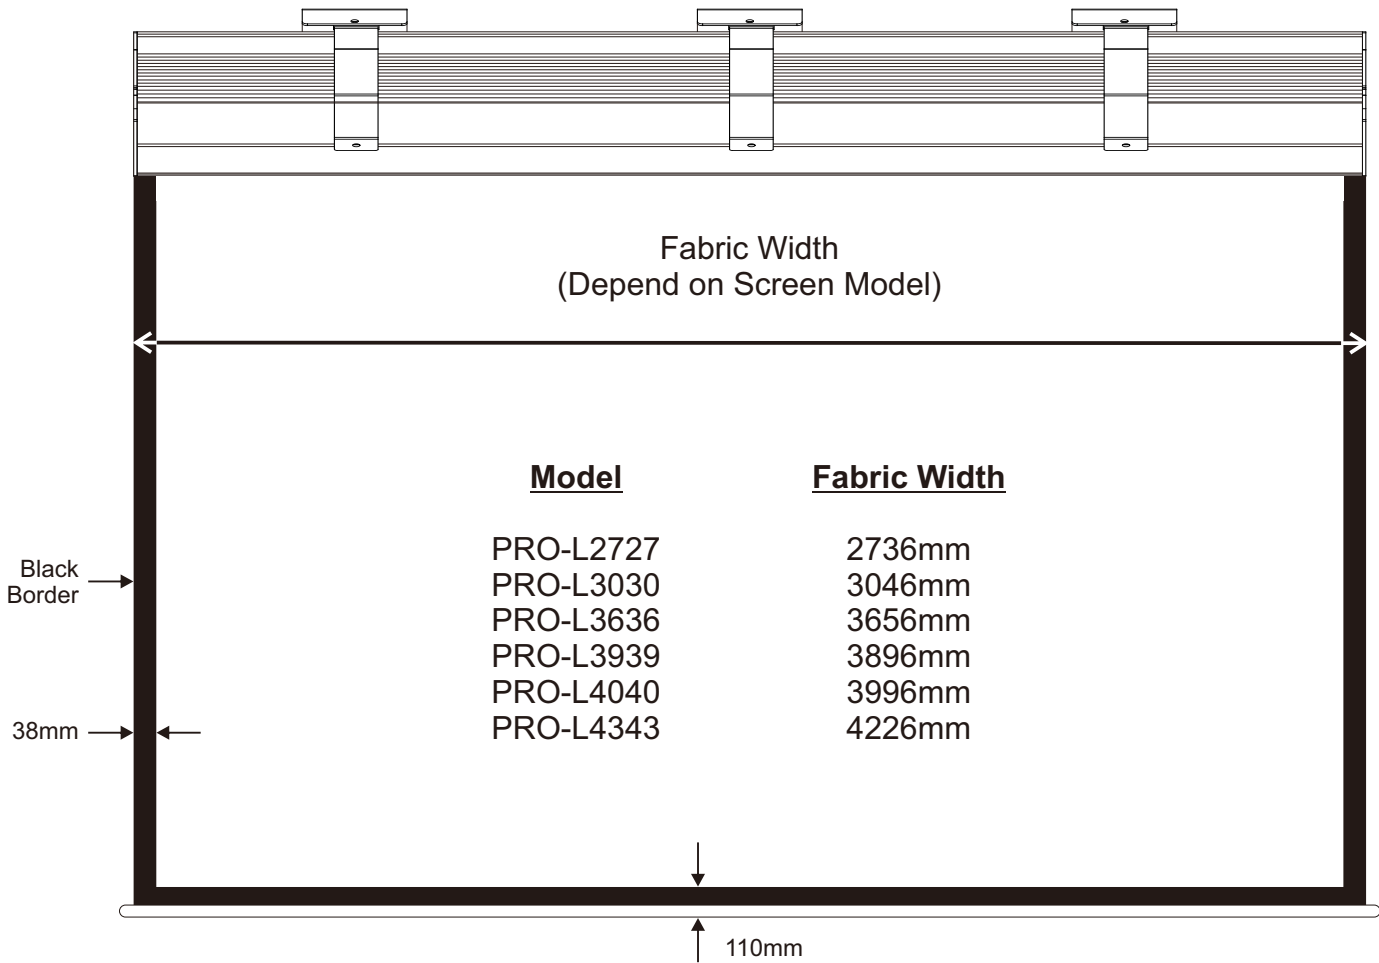

Pelmet depth and height (Minimum):

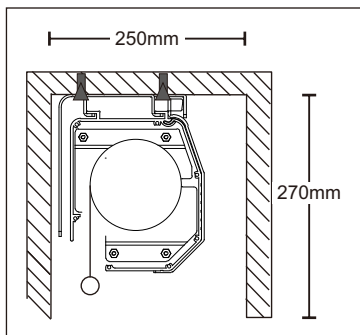


# Pelmet Mounting: Recommended Pelmet Size


## PRO-L Series (HDTV Format)

**Recommended Pelmet Width = Screen Casing Width + 150mm**

Screen Casing Width = Fabric Width + 130mm

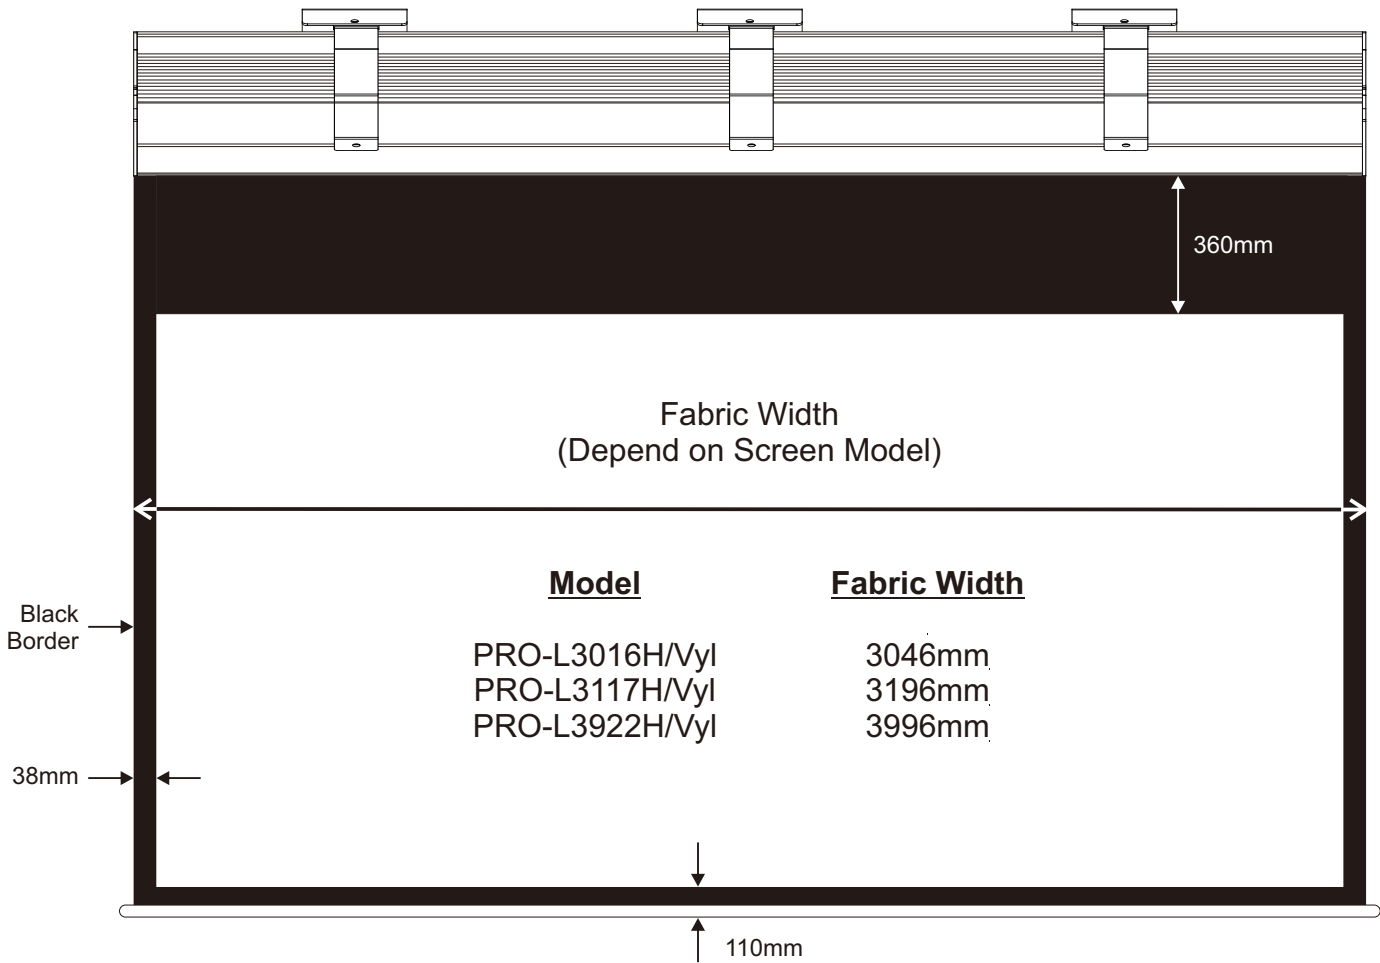

Pelmet depth and height (Minimum):

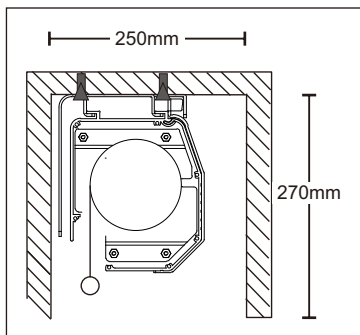


# Pelmet Mounting: Recommended Pelmet Size


## PRO-L Series (Video Format)

**Recommended Pelmet Width = Screen Casing Width + 150mm**

Screen Casing Width = Fabric Width + 130mm

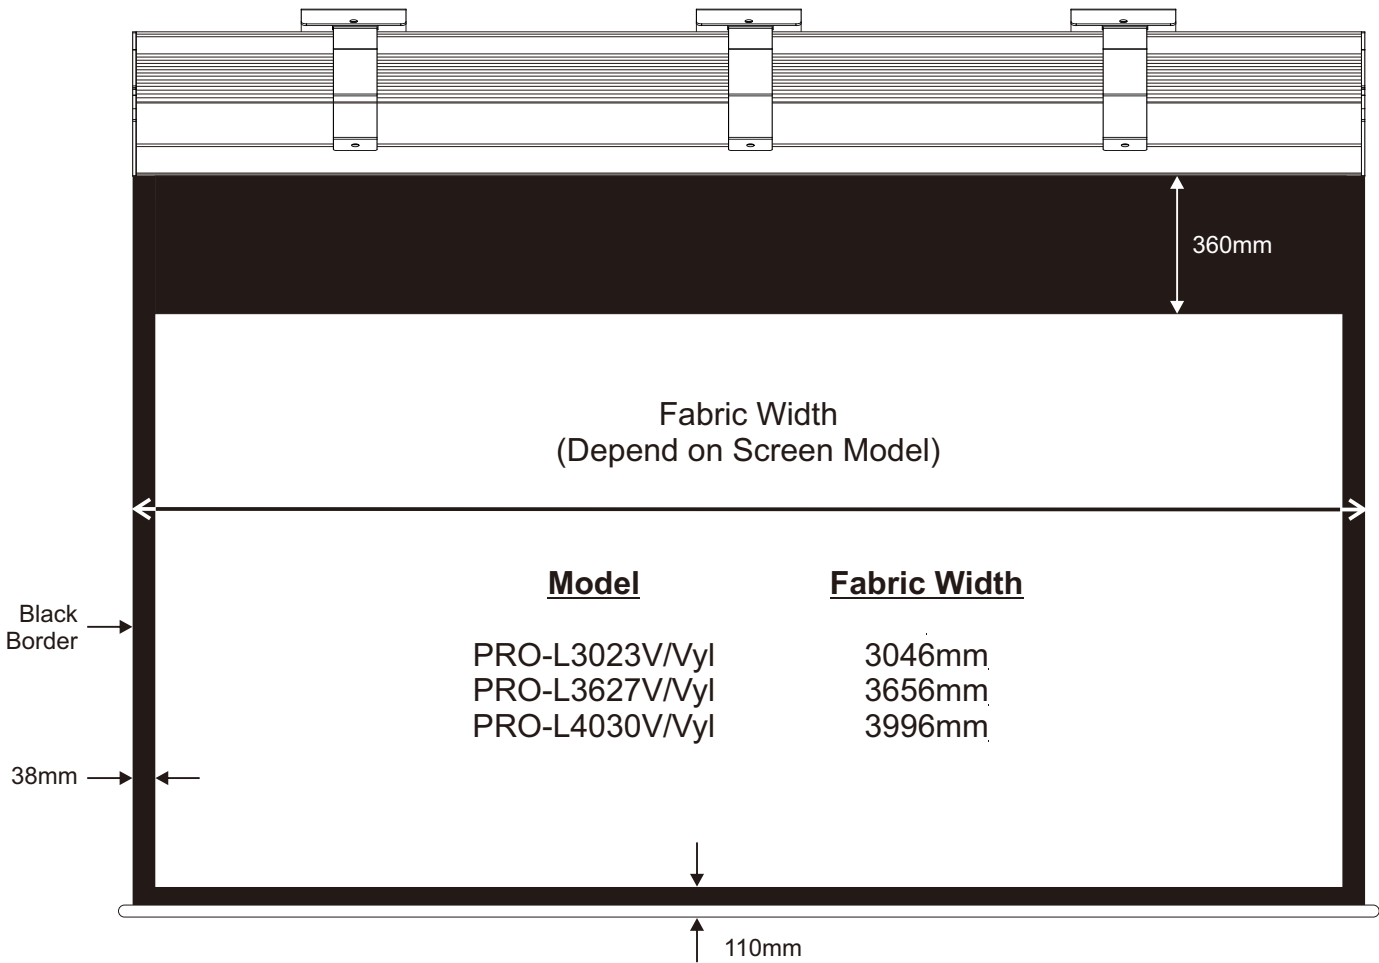

Pelmet depth and height (Minimum):

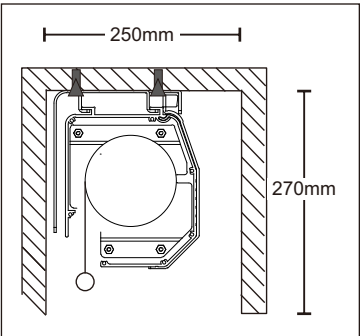


# Pelmet Mounting: Recommended Pelmet Size

## PRO-L Series (Wide Screen Format)

**Recommended Pelmet Width = Screen Casing Width + 150mm**

Screen Casing Width = Fabric Width + 130mm

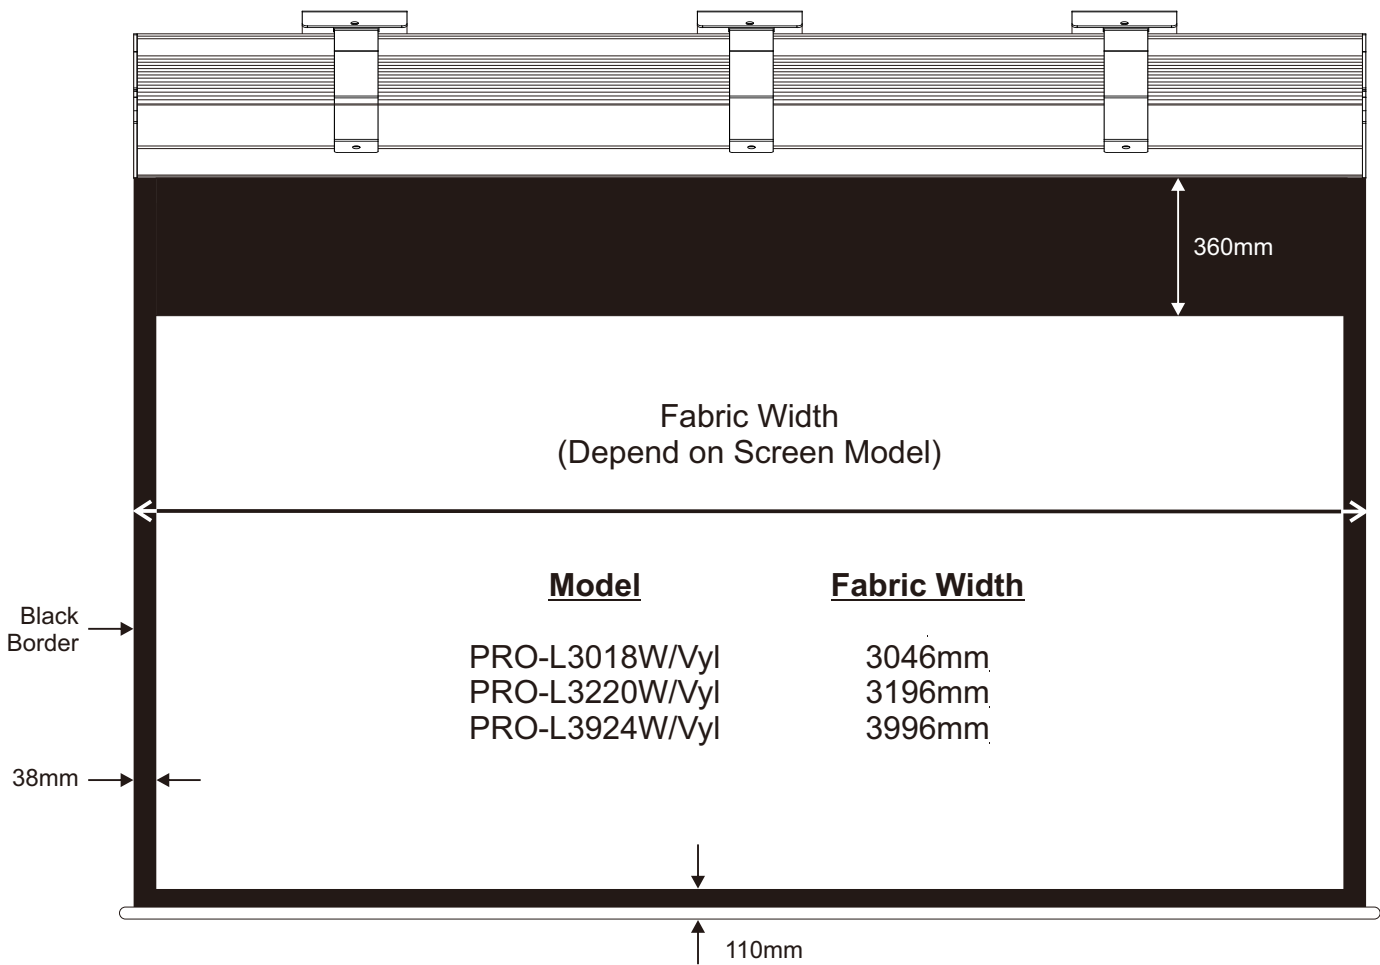

Pelmet depth and height (Minimum):

